

# Product Environmental Profile

## Wiremold® EFB45BT Evolution™ Floor Box Flush Style Cover Plate with Solid Lid



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

- **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

- **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

- **Involve the environment in product design and provide informations in compliance with ISO 14025**

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



### REFERENCE PRODUCT

|                          |  |
|--------------------------|--|
| <b>Function</b>          | Provide access to and protection for power and communication outputs for a 4 gang evolution floor box for 20 years.  |
| <b>Reference Product</b> |  <p>Cat. No. EFB45BT</p> <p>Evolution Series Floor Box Flush Style Cover with Solid Lid</p> |



The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.

### PRODUCTS CONCERNED

The environmental data is representative of the following products (see extrapolation rule at the end of the document):

EFB45BT, EFB45BTC, EFB45CT, EFB45CTC, EFB610BT, EFB610BTC, EFB610CT, EFB610CTC

# Product Environmental Profile

Wiremold® EFB45BT Evolution™ Floor Box  
Flush Style Cover Plate with Solid Lid



## ■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/CE.

For EFB45BT, EFB45BTC, EFB45CT and EFB45CTC, use the table below regarding the constituent materials.

|  |              |  |               |                                  |               |
|--|--------------|--|---------------|----------------------------------|---------------|
| <b>Total weight of Reference Product</b> |              | <b>133.00oz (3770.45g)</b> (with unit packaging) |               |                                  |               |
| <b>Plastics as % of weight</b>           |              | <b>Metals as % of weight</b>                     |               | <b>Other as % of weight</b>      |               |
| Other plastics                           | 4.2 %        | Aluminium  | 56.6 %        |                                  |               |
| PC                                       | 2.5 %        | Zamac  | 3.5 %         |                                  |               |
| PA                                       | 0.2 %        | Steel  | 0.8 %         | <b>Packaging as % of weight</b>  |               |
|  |              | Other metals                                     | 0.2 %         | Paper                            | 20.0 %        |
|  |              |  |               | Wood                             | 10.0 %        |
|  |              |  |               | PE                               | 2.0 %         |
| <b>Total plastics</b>                    | <b>6.9 %</b> | <b>Total metals</b>                              | <b>61.1 %</b> | <b>Total other and packaging</b> | <b>32.0 %</b> |

Estimated recycled material content: 22 % by mass.

For EFB610BT, EFB610BTC, EFB610CT and EFB610CTC, use the table below regarding the constituent materials.

|                                |              |                              |               |                                  |               |
|--------------------------------|--------------|------------------------------|---------------|----------------------------------|---------------|
| <b>Plastics as % of weight</b> |              | <b>Metals as % of weight</b> |               | <b>Other as % of weight</b>      |               |
| Other plastics                 | 5.9 %        | Aluminium                    | 61.2 %        |                                  |               |
| PA                             | 0.2 %        | Steel                        | 0.9 %         |                                  |               |
|                                |              |                              |               | <b>Packaging as % of weight</b>  |               |
|                                |              |                              |               | Paper                            | 23.6 %        |
|                                |              |                              |               | Wood                             | 7.1 %         |
|                                |              |                              |               | PE                               | 1.1 %         |
| <b>Total plastics</b>          | <b>6.1 %</b> | <b>Total metals</b>          | <b>62.1 %</b> | <b>Total other and packaging</b> | <b>31.8 %</b> |



## ■ MANUFACTURE

This Reference Product comes from sites that have received ISO14001 certification.



## ■ DISTRIBUTION

Products are distributed from logistics centers located to optimize transport efficiency using EPA SmartWay® certified carriers to reduce greenhouse gases emissions. The Reference Product is therefore transported by truck from our warehouse to the local point of distribution into the market in North America, over a maximum range distance of 2175 miles [3500km].

## Product Environmental Profile

Wiremold® EFB45BT Evolution™ Floor Box  
Flush Style Cover Plate with Solid Lid



### ■ INSTALLATION

For the installation of the product, only standard tools are needed.



### ■ USE

#### Servicing and maintenance :

Under normal conditions of use, this product requires no servicing or maintenance.

#### Consumables :

No consumables are necessary to use the Reference Product.



### ■ END OF LIFE

Development teams integrate product end-of-life factors in the design phase.

**Hazardous waste\* contained in the product:** no hazardous waste

(\*) Hazardous waste as defined by European Commission decision 2000/532/EC.

#### • Recycling rate:

Calculated using the method described in the IEC/TR 62635 technical report, the recyclability rate of the reference product is estimated as 95 %. This value is based on data collected from a technological channel using industrial procedures. It does not pre-validate the effective use of this channel for end-of-life electrical and electronic products.

Separated into:

- metal materials (excluding packaging) : 61.3 %
- plastic materials (excluding packaging) : 4.2 %
- packaging (all types of materials) : 29.5 %



### ■ ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from products marketed and used in North America.

|                                   |   |
|-----------------------------------|---|
| <b>Manufacture</b>                | Packaging taken into account. As required by the «PEP ecopassport» programme all transports for the manufacturing of the Reference Product, including materials and components, has been taken in account. The waste generated during manufacturing phase has been taken into account.  |
| <b>Distribution</b>               | Transport between the last Group distribution centre and an average delivery to the sales area. 2175 miles [3500km] as defined by the PCR version: PEP-PCR-ed 3-EN-2015 04 02.  |
| <b>Installation</b>               | The end-of-life of the packaging is taken into account at this phase  |
| <b>Use</b>                        | <ul style="list-style-type: none"> <li>• Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>• No consumables are necessary to use this type of product.</li> <li>• Product category: no category pre-defined for this or this kind of product. LCA based on current PSR-003.</li> <li>• Use scenario : no energy consumption during the 20 year working life. This modelling duration does not constitute a minimum durability requirement.</li> <li>• Energy model: Electricity Mix; United States - 2009.</li> </ul> |
| <b>End of life</b>                | The default end of life scenario maximizing the environmental impacts   |
| <b>Software and database used</b> | EIME V5 and its database «CODDE-2015-04» and the indicators defined in the PCR ed3 in alignment with the EN 15804 standard.   |

# Product Environmental Profile

Wiremold® EFB45BT Evolution™ Floor Box  
Flush Style Cover Plate with Solid Lid




## SELECTION OF ENVIRONMENTAL IMPACTS

|   | Total for Life cycle |               | Raw material and manufacture |      | Distribution |      | Installation |      | Use      |    | End of life |      |
|---|----------------------|---------------|------------------------------|------|--------------|------|--------------|------|----------|----|-------------|------|
| Global warming                                | 3.34E+01             | kgCO2 eq.     | 3.25E+01                     | 97%  | 6.57E-01     | 2%   | 6.75E-02     | < 1% | 0.00E+00 | 0% | 1.86E-01    | < 1% |
| Ozone depletion                               | 7.50E-06             | kgCFC-11 eq.  | 7.50E-06                     | 100% | 1.33E-09     | < 1% | 4.07E-10     | < 1% | 0.00E+00 | 0% | 1.92E-09    | < 1% |
| Acidification of soils and water              | 1.75E-01             | kgSO2 eq.     | 1.71E-01                     | 98%  | 2.95E-03     | 2%   | 3.21E-04     | < 1% | 0.00E+00 | 0% | 7.73E-04    | < 1% |
| Water eutrophication                          | 1.46E-02             | kg(P04)3- eq. | 1.24E-02                     | 85%  | 6.78E-04     | 5%   | 2.75E-04     | 2%   | 0.00E+00 | 0% | 1.22E-03    | 8%   |
| Photochemical ozone formation                 | 9.43E-03             | kgC2H4 eq.    | 9.14E-03                     | 97%  | 2.10E-04     | 2%   | 2.27E-05     | < 1% | 0.00E+00 | 0% | 5.84E-05    | < 1% |
| Depletion of abiotic resources - elements     | 4.54E-05             | kgSb eq.      | 4.54E-05                     | 100% | 2.63E-08     | < 1% | 2.91E-09     | < 1% | 0.00E+00 | 0% | 8.68E-09    | < 1% |
| Total use of primary energy                   | 4.66E+02             | MJ            | 4.54E+02                     | 97%  | 8.80E+00     | 2%   | 8.87E-01     | < 1% | 0.00E+00 | 0% | 2.18E+00    | < 1% |
| Net use of fresh water                        | 1.59E-01             | m3            | 1.59E-01                     | 100% | 5.88E-05     | < 1% | 1.80E-05     | < 1% | 0.00E+00 | 0% | 7.15E-05    | < 1% |
| Depletion of abiotic resources - fossil fuels | 3.91E+02             | MJ            | 3.79E+02                     | 97%  | 9.23E+00     | 2%   | 9.42E-01     | < 1% | 0.00E+00 | 0% | 2.49E+00    | < 1% |
| Water pollution                               | 3.00E+03             | m3            | 2.85E+03                     | 95%  | 1.08E+02     | 4%   | 1.05E+01     | < 1% | 0.00E+00 | 0% | 2.55E+01    | < 1% |
| Air pollution                                 | 3.62E+03             | m3            | 3.57E+03                     | 99%  | 2.69E+01     | < 1% | 6.92E+00     | < 1% | 0.00E+00 | 0% | 1.29E+01    | < 1% |

The values of the 27 impacts defined in the PCR-ed3-EN-2015 04 02 are available in the digital database of pep-ecopassport.org website.

## % ENVIRONMENTAL IMPACT PER LIFE CYCLE STAGE OF REFERENCE PRODUCT

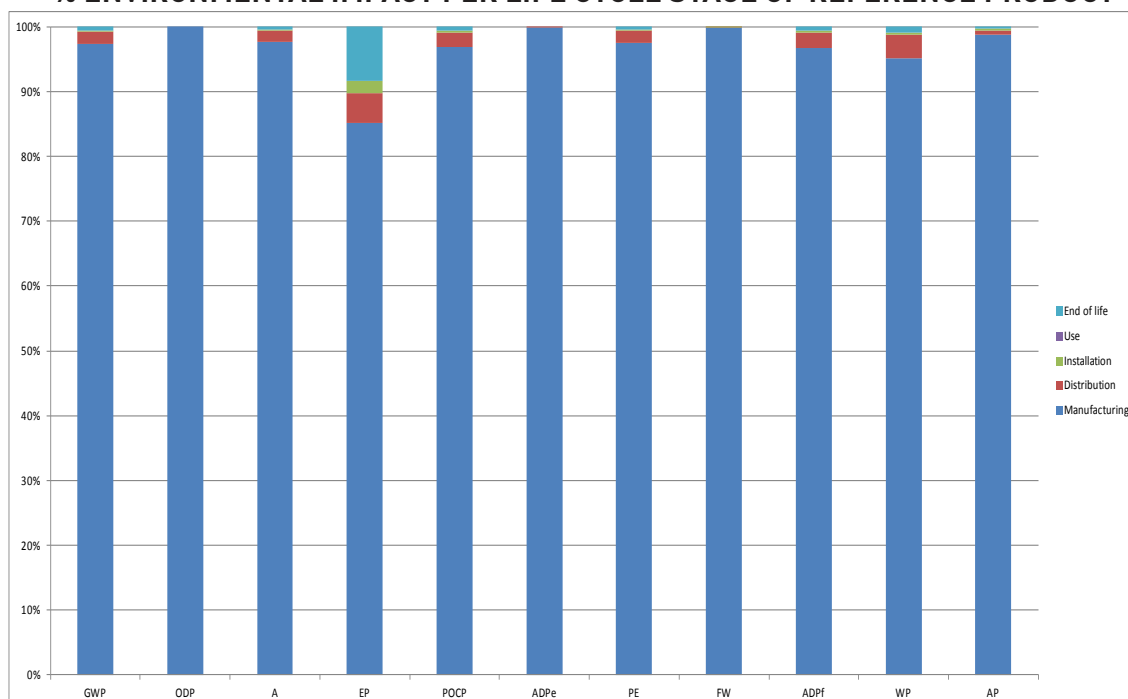

## Product Environmental Profile

Wiremold® EFB45BT Evolution™ Floor Box  
Flush Style Cover Plate with Solid Lid



For products covered by the PEP other than the Reference product, the environmental impacts of each phase of the lifecycle are calculated with:

|           | Manufacturing | Distribution | Installation | Use            | End of life |
|-----------|---------------|--------------|--------------|----------------|-------------|
| EFB45BTC  | 1.0           | 1.0          | 1.2          | Same<br>Values | 1.1         |
| EFB45CT   | 1.0           | 1.0          | 1.2          |                | 1.0         |
| EFB45CTC  | 1.0           | 1.0          | 1.2          |                | 1.1         |
| EFB610BT  | 1.7           | 1.6          | 2.1          |                | 1.4         |
| EFB610BTC | 1.8           | 1.7          | 2.1          |                | 1.5         |
| EFB610CT  | 1.6           | 1.6          | 2.1          |                | 1.4         |
| EFB610CTC | 1.7           | 1.6          | 2.1          |                | 1.4         |

|   |  |
|---|--|
| Registration N°: LGRP-00622-V01.01-EN   | Drafting rules: PEP-PCR-ed3-EN-2015 04 02  |
| Verifier accreditation N°: VH02   | Information and reference documents : <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a> |
| Date of issue: 01-2018  | Validity period: 5 years   |
| Independent verification of the declaration and data, in compliance with ISO 14025:2010<br>Internal <input checked="" type="checkbox"/> External <input type="checkbox"/> |  |
| The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)   |  |
| PEP are compliant with XP C08-100-1: 2014   |  |
| The elements of the present PEP cannot be compared with elements from another program   |  |
| Document in compliance with ISO 14025 : 2010: «Environmental labels and declarations. Type III environmental declarations»  |  |
| Environmental data in alignment with EN 15804 : 2012 + A1 : 2013  |  |

