



|                                         |           |
|-----------------------------------------|-----------|
| Mobile Home Pedestal, 100/200 Amp ..... | 103 - 104 |
| Mobile Home Panel, 200 Amp .....        | 105 - 106 |

# Mobile Home Pedestal

## 100/200 Amp

Mobile Home  
Metering



**M2M200PPD (closed)**



**M2M200PPD (open)**

### Application

- Direct bury design for mobile home applications
- Isolated compartments for customer equipment, circuit breakers, and metering service
- Hinged disconnect cover with padlock provision
- Louvered line section for ventilation
- Separate load exit enclosure
- Provisions for additional breakers
- Receive ANSI C12.10 watt-hour meters
- Underground feed



### Construction

- Ring type
- NEMA Type 3R
- ANSI 61 gray E-coat finish
- Aluminum snap ring included

### Standards

- UL 67 Listed
- ANSI C12.7
- EUSERC 307

### Accessories

- Load exit enclosure - 3245 Kit (see Fig. 2)

| Part/UPC Number | Catalog Number        | Amp Rating | Jaws | Service Type | Access | Voltage | Main Breaker |              | Provisions |
|-----------------|-----------------------|------------|------|--------------|--------|---------|--------------|--------------|------------|
|                 |                       |            |      |              |        |         | AIC          | Main         |            |
| 78205137400     | <b>M1M100PD</b>       | 125        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 100A, 2P | (1) 100A   |
| 78205105591     | <b>M1M100PD MS66</b>  | 100        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 100A, 2P | (1) 100A   |
| 78205137425     | <b>M1M125PD</b>       | 125        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 125A, 2P | (1) 100A   |
| 78205113005     | <b>M1M125PD MS66</b>  | 125        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 125A, 2P | (1) 100A   |
| 78205117765     | <b>M1M150PD MS67</b>  | 150        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 150A, 2P | (1) 100A   |
| 78205117766     | <b>M1M175PD MS67</b>  | 175        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 175A, 2P | (1) 100A   |
| 78205137435     | <b>M2M150PD</b>       | 150        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 150A, 2P | (1) 100A   |
| 78205137445     | <b>M2M175PD</b>       | 175        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 175A, 2P | (1) 100A   |
| 78205137610     | <b>M2M200PD</b>       | 200        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 200A, 2P | (1) 100A   |
| 78205137620     | <b>M2M200PD MS67</b>  | 200        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 200A, 2P | (1) 100A   |
| 78205137630     | <b>M2M200PPD</b>      | 200        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 200A, 2P | (2) 100A   |
| 78205137640     | <b>M2M200PPD MS67</b> | 200        | 4    | 1Ø/3W        | UG     | 120/240 | 10K          | (1) 200A, 2P | (2) 100A   |

| Part/UPC Number | Catalog Number        | Connections  |      | Neutral      | Overall Dimensions |       |                                 | Top Provision | Knockout Layout |
|-----------------|-----------------------|--------------|------|--------------|--------------------|-------|---------------------------------|---------------|-----------------|
|                 |                       | Line         | Load |              | Height             | Width | Depth                           |               |                 |
| 78205137400     | <b>M1M100PD</b>       | #6 - 350 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205105591     | <b>M1M100PD MS66</b>  | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137425     | <b>M1M125PD</b>       | #6 - 350 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205113005     | <b>M1M125PD MS66</b>  | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205117765     | <b>M1M150PD MS67</b>  | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205117766     | <b>M1M175PD MS67</b>  | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137435     | <b>M2M150PD</b>       | #6 - 250 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137445     | <b>M2M175PD</b>       | #6 - 250 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137610     | <b>M2M200PD</b>       | #6 - 250 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137620     | <b>M2M200PD MS67</b>  | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137630     | <b>M2M200PPD</b>      | #6 - 250 MCM | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |
| 78205137640     | <b>M2M200PPD MS67</b> | Studs        | MCB  | #6 - 350 MCM | 78"                | 10"   | 4 <sup>5</sup> / <sub>8</sub> " | None          | Fig. 1          |

MCB - Main Circuit Breaker


| Style #   | Suffixes                                         |
|-----------|--------------------------------------------------|
| M1M1xxPD  | <b>SS</b> - Stainless Steel *                    |
| M2M1xxPD  | <b>MS66</b> - Studs replace line side connectors |
| M2M2xxPD  | <b>MS67</b> - Studs replace line side connectors |
| M2M2xxPDD |                                                  |

### Knockouts - Conduit Sizes

1A = 1/2"  
 2B = 3/4" - 1/2"  
 4F = 2" - 1 1/2" - 1 1/4" - 1"

\* Knockouts and top provisions are not available in Stainless Steel (SS) finish

### Knockout Layouts

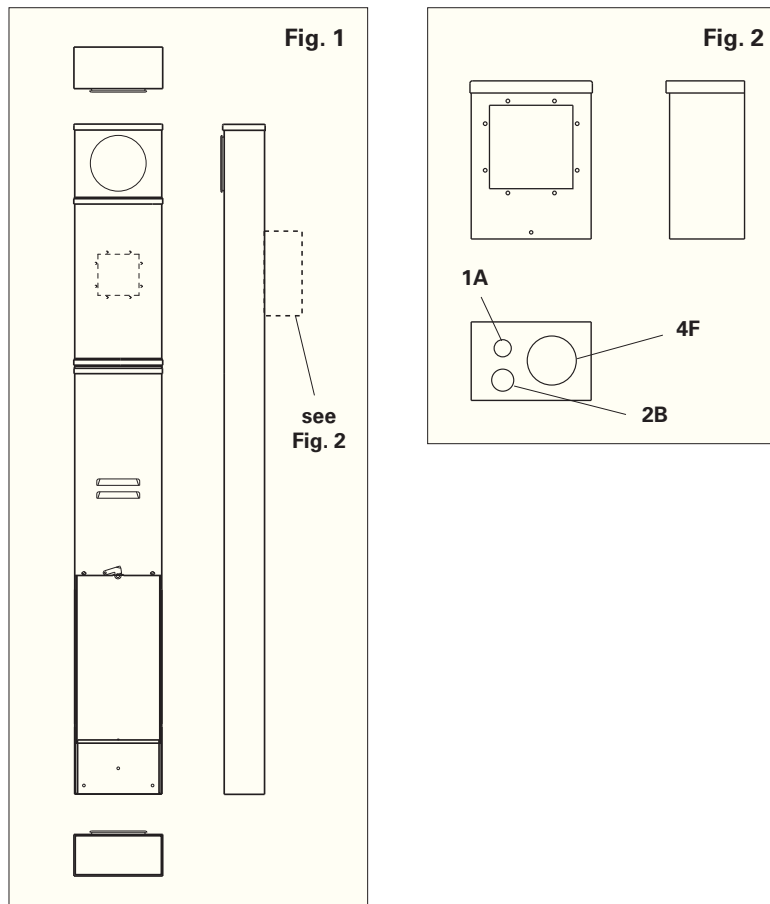

# Mobile Home Panel

## 200 Amp

Mobile Home  
Metering



UM2M200P (closed)



UM2M200P (open)

### Application

- Designed for mobile home applications
- Provisions for additional breakers
- Receive ANSI C12.10 watthour meters
- Overhead or underground feed (see chart)
- Surface mount

### Construction

- Ring type
- NEMA Type 3R
- ANSI 61 gray E-coat finish
- Aluminum snap ring included

### Standards

- UL 67 Listed
- ANSI C12.7

### ACCESSORIES

- Flush Trim Kit - FK 1430
- AW Hubs



| Part/UPC Number | Catalog Number | Amp Rating | Jaws | Service Type | Access | Voltage | Main Breaker |              |            |
|-----------------|----------------|------------|------|--------------|--------|---------|--------------|--------------|------------|
|                 |                |            |      |              |        |         | AIC          | Main         | Provisions |
| 78205157310     | UM2M200        | 200        | 4    | 1Ø/3W        | OH/UG  | 120/240 | 10K          | (1) 200A, 2P | --         |
| 78205157315     | UM2M200P       | 200        | 4    | 1Ø/3W        | OH/UG  | 120/240 | 10K          | (1) 200A, 2P | (1) 2P     |
| 78205157320     | UM2M200PP      | 200        | 4    | 1Ø/3W        | OH/UG  | 120/240 | 10K          | (1) 200A, 2P | (2) 2P     |

| Part/UPC Number | Catalog Number | Connections  |      |              | Height | Overall Dimensions |                                 | Top Provision | Knockout Layout |
|-----------------|----------------|--------------|------|--------------|--------|--------------------|---------------------------------|---------------|-----------------|
|                 |                | Line         | Load | Neutral      |        | Width              | Depth                           |               |                 |
| 78205157310     | UM2M200        | #6 - 250 MCM | MCB  | #6 - 250 MCM | 30"    | 14"                | 4 <sup>5</sup> / <sub>8</sub> " | AW Hub        | Fig. 1          |
| 78205157315     | UM2M200P       | #6 - 250 MCM | MCB  | #6 - 250 MCM | 30"    | 14"                | 4 <sup>5</sup> / <sub>8</sub> " | AW Hub        | Fig. 1          |
| 78205157320     | UM2M200PP      | #6 - 250 MCM | MCB  | #6 - 250 MCM | 30"    | 14"                | 4 <sup>5</sup> / <sub>8</sub> " | AW Hub        | Fig. 1          |

MCB - Main Circuit Breaker

Data subject to change without notice. Consult local utility for area acceptance. All dimensions are in inches.

| Style #   | Suffixes               |
|-----------|------------------------|
| UM2M200   | SS - Stainless Steel * |
| UM2M200P  |                        |
| UM2M200PP |                        |

| Knockouts - Conduit Sizes          |
|------------------------------------|
| 1A = 1/2"                          |
| 2C = 1" - 3/4"                     |
| 4D = 1 1/4" - 1" - 3/4" - 1/2"     |
| 4G = 2 1/2" - 2" - 1 1/2" - 1 1/4" |
| Top Provision = See Chart          |

\* Knockouts and top provisions are not available in Stainless Steel (SS) finish

Mobile Home  
Metering

Knockout Layouts

