




## OLB-6 - 2" LB Hub O Conduit Body

By Killark  
Catalog # [OLB-6](#)

2" LB Hub O Conduit Body

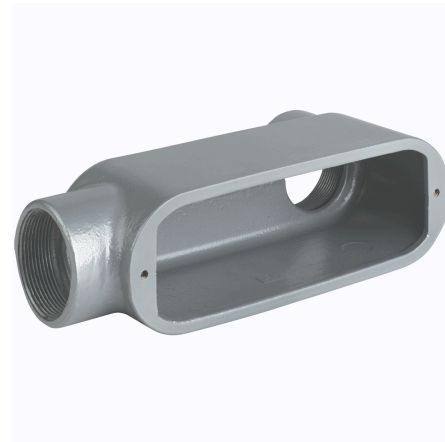

### Features

- Raintight when used with gasketed covers.
- Malleable iron suitable for use in concrete.
- Interchangeable with competitive products.
- Stainless steel screws on stamped and cast covers.
- Tapered threaded hubs (NPT).

### Application

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC.

### Specifications

EU RoHS Indicator	Contact Manufacturer
CSA File Number	LR11852
Hazardous Rating(s)	Suitable for use in hazardous location applications when installed according to NEC Articles 501.10(b) (Class I, Division 2) or 502.10, 503.10, and 505.15 (Class I Zone 2).
UL File Number	E3397

### Configuration

Hub Pattern LB

### Dimensions

Hub Size	2"
Length	10 in
Gross Weight with Packaging	2.05
Width	4 in
Weight	2.05 lb.
Height	5 in
Dimensions	10 in x 4 in x 5 in

### General

Series	O Series
Color	Gray
Type	Conduit Body
Material	Aluminum, Copper Free (less than 4/10 of 1%)
UPC	783936490304

### Logistics

Carton Quantity 5

### Product Assets

[Catalog \[English\]](#)