



Main

Panelboard Type	Main lugs
Product or component type	Interiors
Branch Circuit Breaker Type	QOB QOB-VH QHB
Busbar Material	Copper

Complementary

Number of spaces	42
Enclosure Nominal Height	50 in (1270.00 mm)
Enclosure Nominal Width	20 in (508.00 mm)
Enclosure Nominal Depth	5.75 in (146.05 mm) NEMA 1 6.5 in (165.10 mm) NEMA 3R/5/12
Line Rated Current	400 A
[Iu] rated interrupted current	10 KA 22 KA 65 kA
Wiring configuration	4-wire
Number of Phases	3 phase
Voltage Rating	240 V AC 48 V DC
Connections - terminals	Lug line AWG 1/0...750 kcmil aluminium Lug neutral AWG 1/0...750 kcmil aluminium
Net Weight	26.65 lb(US) (12.09 kg)
Tightening torque	274.99...300.04 Lbf.In (31.07...33.90 N.m) 0.08...0.59 in ² (53.48...380 mm ²) AWG 1/0...750 kcmil 274.99...300.04 Lbf.In (31.07...33.90 N.m) 0.08...0.27 in ² (53.48...177.3 mm ²) AWG 1/0...350 kcmil 549.98 Lbf.In (62.14 N.m) 0.08...0.59 in ² (53.48...380 mm ²) AWG 1/0...750 kcmil 549.98 Lbf.In (62.14 N.m) 0.08...0.24 in ² (53.48...152 mm ²) AWG 1/0...300 kcmil 375.01 Lbf.In (42.37 N.m) 0.08...0.59 in ² (53.48...380 mm ²) AWG 1/0...750 kcmil 375.01 lbf.in (42.37 N.m) 0.08...0.24 in ² (53.48...152 mm ²) AWG 1/0...300 kcmil
Width	10.44 in (265.18 mm)
Height	45 in (1143.00 mm)

Environment

Standards	CSA UL
-----------	-----------

Ordering and shipping details

Category	09151 - NQ RTA PANELBOARDS
Discount Schedule	PE1A
GTIN	00785901507918
Nbr. of units in pkg.	1
Package weight(Lbs)	21.75 lb(US) (9.87 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	6.50 in (16.5 cm)
Package 1 width	14.02 in (35.6 cm)
Package 1 Length	50.00 in (127 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	15
Package 2 Weight	327.00 lb(US) (148.325 kg)
Package 2 Height	40.00 in (101.6 cm)
Package 2 width	42.00 in (106.68 cm)
Package 2 Length	60.00 in (152.4 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile


Contractual warranty

Warranty	18 months
----------	-----------


Approximate Dimensions

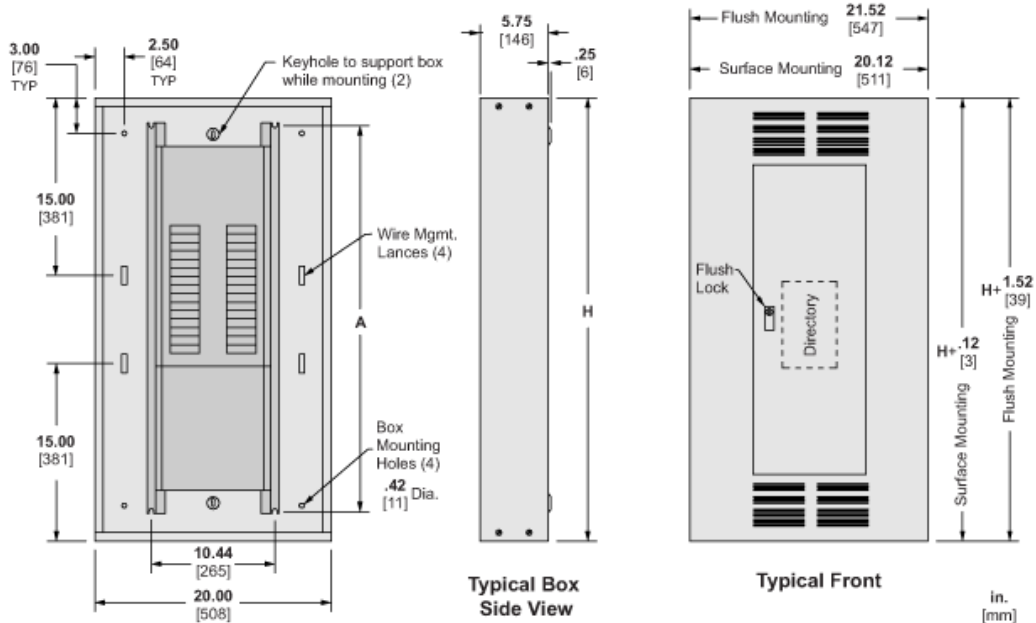

Typical Box with Interior

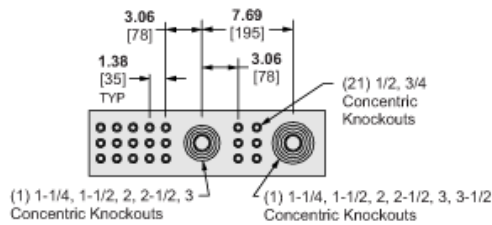

Endwall with Knockouts
(Other Endwall is Blank)



Typical Mounting of
QO/QOB Circuit Breakers

MAXIMUM MAIN LUGS AMPERE RATING	MAXIMUM NUMBER OF CIRCUITS	H		A	
		IN	MM	IN	MM
400A	30 & 42	50.00	1270	45.00	1143
	54	56.00	1422	51.00	1295
	72	62.00	1575	57.00	1448
	84	68.00	1727	63.00	1600
400A WITH SUB FEED LUGS	30 & 42	50.00	1270	45.00	1143
	54	56.00	1422	51.00	1295
	72	62.00	1575	57.00	1448
	84	68.00	1727	63.00	1600
400A WITH FEED THRU LUGS	30 & 42	56.00	1422	51.00	1295
	54	62.00	1575	57.00	1448
	72	68.00	1727	63.00	1600
	84	74.00	1880	69.00	1753
400A WITH SUB FEED BREAKERS	30 & 42	74.00	1880	69.00	1753
	54	80.00	2032	75.00	1905
	72	86.00	2184	81.00	2057
	600A *	30 & 42	50.00	1270	45.00
54		56.00	1422	51.00	1295
72		62.00	1575	57.00	1448
84		68.00	1727	63.00	1600
600A WITH FEED THRU LUGS	30 & 42	62.00	1575	57.00	1448
	54	68.00	1727	63.00	1600
	72	74.00	1880	69.00	1753
	84	80.00	2032	75.00	1905
600A WITH SUB FEED BREAKERS	30 & 42	74.00	1880	69.00	1753
	54	80.00	2032	75.00	1905
	72	86.00	2184	81.00	2057

* For Type 3R enclosure, increase height dimension by 12.00 / [305]