




LED AREA LIGHT SHOEBOX GEN 4

60/80/100W, 120-277V, 5000K

Morris CAT#: 74046C

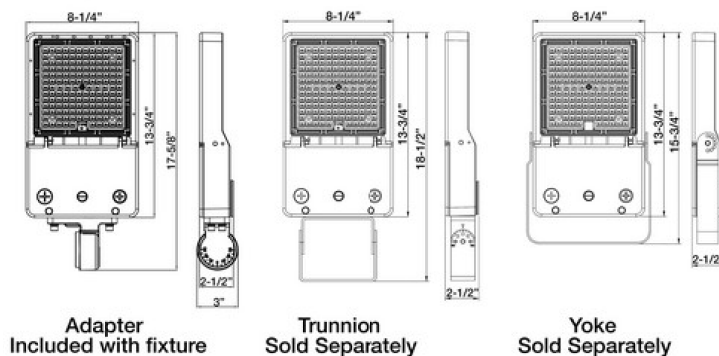


60-100W

Features:



- SMD 3030 LEDs
- Corrosion resistant White Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type III
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: PPZKJ18A
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID#:
74046C	White	60/80/100W	13,800 @80W	5000K	120-277V	134°	138lm/w	PPZKJ18A

PHOTOMETRY

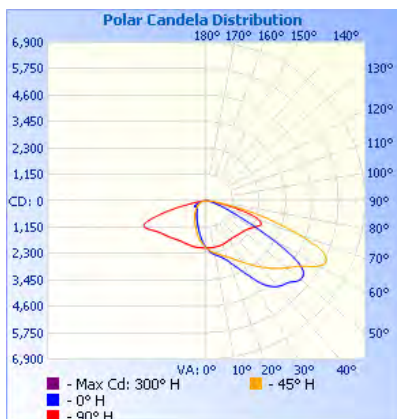

Center Beam fc	Beam Width
17.0 ft	7.10 ft
34.0 ft	1.77 ft
51.0 ft	0.79 ft
68.0 ft	0.44 ft
85.0 ft	0.28 ft
102.0 ft	0.20 ft

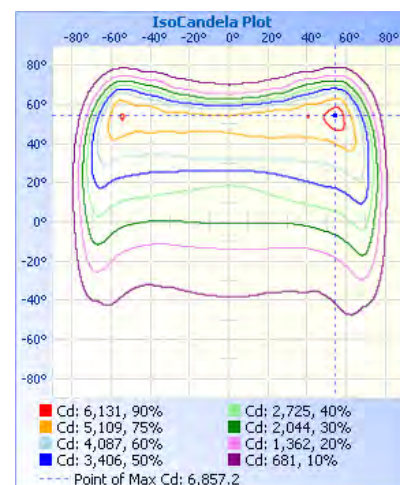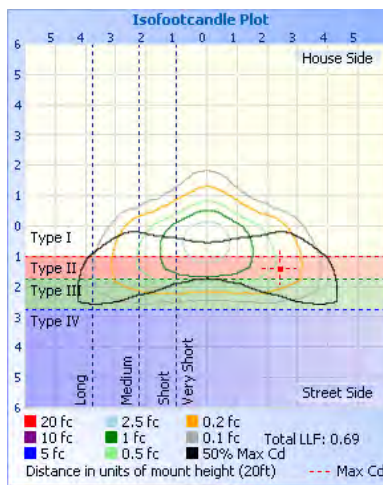



LED AREA LIGHT SHOEBOX GEN 4

60/80/100W, 120-277V, 5000K

Morris CAT#: 74046C

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: .32A @ 277V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 12.3% @ 277V

Product Parameters:

60/80/100W Watts

Efficacy: 138 lumens per watt

50,000+ LED Life Span

CCT: 5000K

Chromaticity Measurements:

Beam Angle: 134°

CRI: 75

R9: -28

DUV: 0.0020

Chromaticity (x,y): x=0.3323; y= 0.3448

Chromaticity (u,v): u=0.2054; v= 0.4794

Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

Dimming: 0-10V

***Photo Control:**

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

*Twist lock receptacle is installed on fixture and shorting cap is include in the box

Operating Temperature:

Minimum Starting: -22°F To 122°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

EPA: 1.15ft²

Weight: 9.5lbs

Mounting Accessories Sold Separately

Listing:

cULus

DLC PRODUCT ID#: PPZKJ18A

Accessories (Sold Separately):

- Pole Arm Mount (80-300W) White - For Round and Square Poles - CAT#: 74033A
- Slipfitter Mount (80-300W) White - CAT#: 74035A
- Trunnion Mount (80-300W) White - CAT#: 74039C
- Universal Mount (80-300W) White - CAT#: 74044A
- Yoke Mount (60-100W) White - CAT#: 74734C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).