




Quiktron
Q-Series Patch Cords, CAT5E, Booted, Blue, 1 FT
Part No. 570-110-001

Q-Series patch cords are perfect solution for when cost and speed of delivery are top priority. Designed to perform to TIA-568.2-D standards, Q-Series cords are available in a full range of colors and lengths, stocked and ready to order.

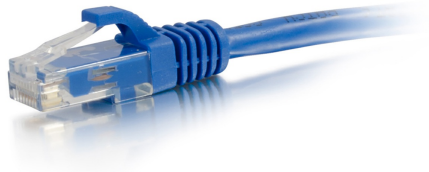

Features & Benefits

Connector: 50micron gold plated RJ45 male to male

Conductor: 24AWG stranded copper

Warranty Type: Lifetime warranty

Price Sensitive: Perfect solution for when cost and speed of delivery are top priority

Standards Compliant: Perform to TIA-568.2-D standards

Specifications

General Info

| | | | |
|---------------|-------------------|--------------------|------------------------|
| Product Line | Quiktron | Color | Blue |
| UPC Number | 884815778152 | Country Of Origin | Vietnam |
| Features | Standard Diameter | Application Sector | Commercial, Industrial |
| Warranty Type | 5-Year | Type | Copper Patch Cord |

Dimensions

| | | | |
|-------------------|----------|-------------------|--------|
| Product Weight US | 0.025 lb | Product Length US | 1.0 FT |
| Cable Length | 1 ft | | |

Additional Information

| | | | |
|---------------------------|---------------------------|-----------------------------|---------------------------|
| RoHS Compliant | Yes | | |
| Technical Information | | | |
| Operating Temperature Min | -10 °C | Category Performance Rating | Cat5e |
| Compatibility | RJ-45 | Wire Gauge | 28 AWG |
| Storage Humidity | 0-90% RH (Non-Condensing) | Plating Specification | 50 µ in Gold |
| Jacket Application | Riser Rated | Bend Radius | 0.82 in |
| Shielded/Unshielded | Unshielded | Termination Style | Pre-Terminated |
| Conductor Stranding | Stranded | Operating Temperature Max | 60 °C |
| Cable Type | Snagless | Jacket Rating | CM Rated |
| Cable Diameter | 0.205 in | Braid | Non-braided Wiring |
| Connector 2 | RJ-45 Male | Connector 1 | RJ-45 Male |
| Operating Temperature | -10°-60°C | Operating Humidity | 0-90% RH (Non-Condensing) |
| Conductor Material | Copper | Voltage | 300.0 V |
| Storage Temperature | -40° - 60° C | | |